

Stainless Gooseneck Sink Mixer - Cold Start



PRODUCT CODE

VSS014

COLOUR/FINISHES

Brushed Stainless (304)

FEATURES

ColdStart Technology
Swivel spout

PRESSURE TYPE

All Pressures

MINIMUM PRESSURE

35kPa

MAXIMUM PRESSURE

500kPa (As per NZ Building Code AS/NZ 3500.1)

WELS RATING - MAINS PRESSURE

5 Star (6L/min)

WELS RATING - LOW PRESSURE

4 Star (6.5L/min)

CARTRIDGE/HEADWORKS

European Ceramic Cartridge

MAXIMUM TEMPERATURE

65°C

PLUMBING CONNECTION


15mm

SPOUT REACH

200mm

BENCH HOLE SIZE

35mm

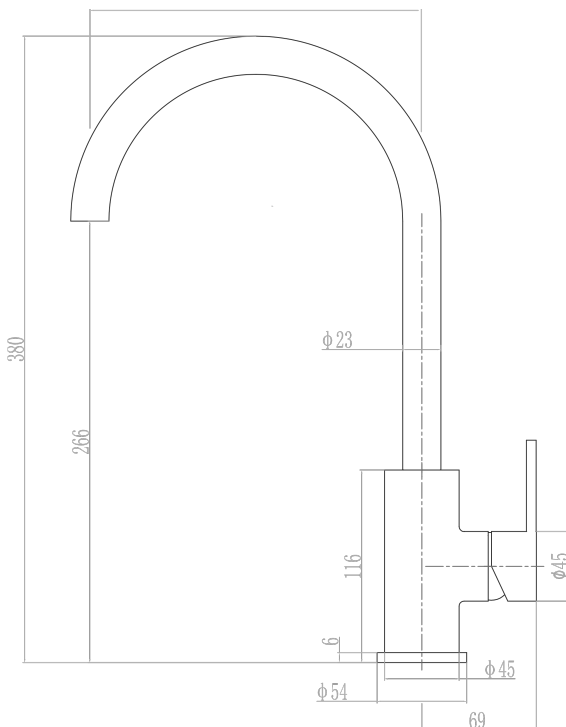

Voda Plumbingware products are in full compliance with the requirements as set out in the New Zealand Building Code:

www.vodaplumbingware.co.nz/building-code-clauses/

This product is not subject to a warning or ban under section 26 of the Building Act 2004.

Specifications and dimensions correct at time of publication however are subject to change without notice.

Please refer to physical product prior to installation.

Installation instructions for this product are available from the product page on vodaplumbingware.co.nz